

THER UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHAVE COME:

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office

July 27, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/479,541

FILING DATE: June 17, 2003

P1 1198994


**RELATED PCT APPLICATION NUMBER: PCT/US04/19271** 

REC'D 3 0 JUL 2004

By Authority of the

WIPO PC

COMMISSIONER OF PATENTS AND TRADEMARKS




N. WOODSON
Certifying Officer

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)

•'	Ē
8	▆
$\approx$	
$\geq$	
$\equiv$	
200	
ℴℷ	_

lease type a plus sign (+) inside this box	<b>→</b>		
--	----------	--	--



# PROVISIONAL APPLICATION FOR PATENT COVER SHEET (Small Entity)

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

			INVENT	OR(S)/APPLIC	ANT(S)				_
Given Name (first and m	iddle [if any])	Famil	y Name or St	ımame	Residence (City and either State or Foreign Country)				
Andrew C.		Kular			10 Pulaski Avenue Riverside, NJ 08075 US				
Additional inve	entors are b	eing named	d on page	2 attached I	nereto				
		TITLE	OF THE IN	VENTION (28	characters:	max)			
A TWO STAGE ENER	GY STORAG	E DEVICE	·			; <u>.</u>			
Direct all corresponden	ce to:		CORRES	PONDENCE A	DDRESS				1
Customer Numbe					····		ice Customei Bar Code Lab		
Individual Name		It Lechner \	Noodbridg	LLP					
Address	Thomas. Or				· · · · · · · · · · · · · · · · · · ·		<del> </del>		
Address	P.O. Box 59	2			····	· · · · · · · · · · · · · · · · · · ·	T		
City	Princeton		:	State	NJ		ZIP	08542	
Country	us			Telephone	609-924-37		Fax	609-924-1811	
	<del></del>	ENCLOS	ED APPLIC	ATION PART	S (check all t	hat apply)			
Specification	Number of Pages 11 Small Entity Statement								
Drawing(s)	Number of Sheets  Other (specify)  Acknowledgement Post Card;  Express Mail Certificate								
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)									
A check or mor	nev order is e	nclosed to co	ver the filing	ı fees				FILING I AMOUN	
The Commissi	ioner is heret	oy authorized	to charge		23	3-3040	7	\$80.0	0
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.  No.  Yes, the name of the U.S. Government agency and the Government contract number are:									
						<del></del>			
Respectfully submitte	ed,								
SIGNATURE	TA	Wads	D	alla.	_ Da	ate 6	117/03	<b>)</b>	
TYPED or PRINTED	NAME TH	nomas J. C	nka			EGISTRA <sup>.</sup> appropria		42,053	}
TELEPHONE	60	09-924-377	3						

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, DC 20231

EXPRESS MAIL NUMBER EV044713420US FILE NUMBER 5276-110P

#### "EXPRESS MAIL CERTIFICATE"

"Express Mail" Mailing Label Number: EV044713420US

Express Mail Corporate Account Number: X085783

Date of Deposit: 6/17/03

Title: A TWO STAGE ENERGY STORAGE DEVICE

Inventor: Andrew C. Kular

Type of Documents:

- 1. Provisional Patent Application Transmittal Letter (x2) 1 page
- 2. Our check for \$80 to cover the Filing Fee
- 3. Provisional Patent Application 11 pages
- 4. Verified Statement Claiming Small Entity 2 pages
- 5. Express Mail Certificate 1 page
- 6. Acknowledgement Post Card 1 page

I hereby certify that the enclosed documents are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria VA 22313-1450

Thomas J. Onka

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper of fee)

5

20

Patent: US3921049: Charging circuit for battery-operated devices powered by solar cells

Inventor: Mellors, Geoffrey W.; Strongsville, OH

Published / Filed: 1975-11-18 / 1973-09-25

10 Patent: US5635816: Method and apparatus for controlling battery-charging current

REFERENCES

Inventor: Welsh, Daniel; Solana Beach, CA

Gerken, Kenneth F.; Brookeville, MD

Published / Filed: 1997-06-03 / 1995-08-01

Patent: US6339311: Photovoltaic power source for portable electronic device

Inventor: Caldwell, Barry E.; Heston, KS

Published / Filed: 2002-01-15 / 2000-11-15

Patent: US6367259: Battery-less solar power system Inventor: Timm, Miguel A.; Spring, TX 77388-5721

Published / Filed: 2002-04-09 / 2000-02-15

### FIELD OF INVENTION

This invention relates to electronic power management and storage devices.

## BACKGROUND OF THE INVENTION

Portable electronic and electrical devices (PEDs) require lightweight and compact

10 power sources, and while some very low power devices (e.g. calculators) can be powered
directly from energy sources such as photovoltaic cells (PV), for many practical PEDs a
higher capacity energy storage device such as an electro-chemical battery (battery) is
required. Many PEDs employ rechargeable batteries as a means for storing energy
during the recharging process and then release the stored energy while the PED is in use.

15

20

5

As is well known to those skilled in the art, electro-chemical batteries have specific requirements for safe and efficient charging. These specific requirements vary by the specific battery technology but in all cases, safe and efficient charging requires applying energy within specific voltage and current levels for specific periods of time. For this reason, the typical energy source employed for charging batteries is generally from stationary and much larger source of energy such as, for example, electric utility mains power or an automobile battery.

25

The need to have access to a large power source at a fixed stationary location is often not convenient since the very nature of a PED is that the PED is portable and often in use some distance away from a large stationary source of power to recharge the battery. As is also well known to those skilled in the art, there are many potential sources of energy that might be employed to recharge a battery however many of these alternatives to large fixed sources of energy are often of an intermittent nature and may

be of too low a level of power to be transformed by conventional methods to suit the specific voltage and current levels needed to safely and efficiently charge a battery.

5 Examples of such potential alternative sources of energy are photovoltaic cells, manually operated electro-magnetic mechanical generators, and brief connections to electric power utility mains while briefly pausing near such mains.


It is the objective to this invention to provide the means for the efficient capture

and accumulation of such potential alternative intermittent and variable sources of energy
until there is sufficient energy accumulated in a 1<sup>st</sup> stage energy storage device so that it
then be properly conditioned and transformed so that it can be efficiently employed to
recharge a 2<sup>nd</sup> stage of energy storage such as a rechargeable electro-chemical battery.

15 PRIOR ART

Simple means to recharge an electro-chemical battery using intermittent and variable sources such as photovoltaic cells are well known. For example, Mellors49 employs the circuit of figure 1 for this purpose.

Express Mail Certificate EV 044713420 US Our File: 5276-110P

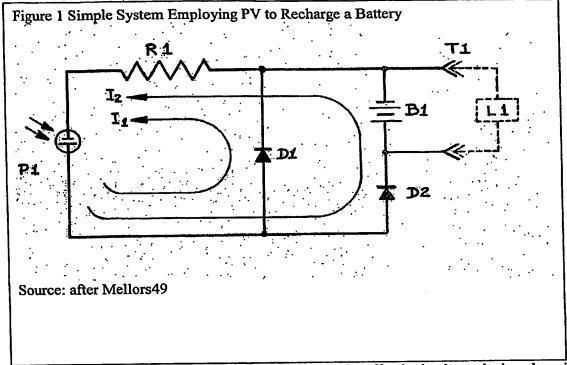


In the system of figure 1, the battery can only be effectively charged when there is sufficient light intensity such that the voltage output from the PV cell exceeds the battery voltage plus the forward biased diode threshold of device D2. In this case, any energy generated by the PV that is below voltage and current threshold is wasted since it cannot charge the battery B1.

5

10

A further problem with the approach of figure 1 is that some modern battery technologies such as Li-Ion cannot be safety charged without charge management electronics to limit voltage and current levels into the battery B1. Such charge management electronics may have even more demanding voltage and current levels than charging the battery directly. For this reason it is not uncommon to employ charge management electronics between the PV cell and the battery. This approach is described, for example, in Welsh16 and shown in simplified form in figure 2.

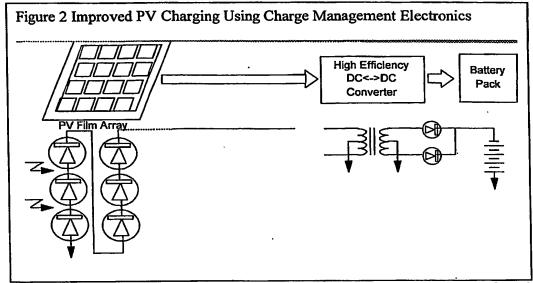

In figure 2 a high efficiency electronic circuit, typically in the form of a DC to DC converter and associated regulation and sensing circuitry is used to convert the DC voltage from the array of PV cells to a voltage more suitable than a direct connection between the PV cells and the battery as in figure 1.

5

10

While the approach in figure 2 is an improvement over that of figure 1, it still suffers from the inability to effectively make use of low levels or brief periods of illumination for two related reasons: 1) If the level of illumination is of a low level the voltage generated by the PV cell will not be sufficient to operate the DC to DC converter as any practical electronic device requires voltages well above zero to operate with an efficiency. And 2) If there are very high levels of illumination for a brief period, the PV cells might produce more energy than the batteries can safety absorb during the brief period of illumination. In this case the excess energy generated by the PV cells will be wasted since it cannot be captured and stored in the battery.

15

Timm 59 recognizes the value of capturing variable and intermittent energy such as from a PV cell source and accumulates this energy in a 1<sup>st</sup> stage of energy storage. However, Timm59 employs the stored energy to operate a device directly and unlike the

present invention makes no attempt to transfer the 1<sup>st</sup> stage soft energy storage to a 2<sup>nd</sup> stage of hard storage such as an electro-chemical battery.

5

10

20


#### SUMMARY OF THE INVENTION

According to the present invention, an intermediate, or 1<sup>st</sup> stage of energy storage is inserted between the variable and intermittent energy source and the battery charge management electronics, which connects to the 2<sup>nd</sup> stage storage in the form of electrochemical battery. The preferred embodiment comprising:

- a) An intermittent and variable energy source such as from an array of photovoltaic cells.
- b) A 1<sup>st</sup> stage of soft storage such as high value capacitor as might be realized by an electrical double layer capacitor (also known as an Ultra capacitor or Supercapacitor).
  - c) Voltage sensing and control logic electronics which monitors the voltage, and thus the energy accumulated in the 1<sup>st</sup> stage of storage, and when the voltage is above a minimum threshold, connects the 1<sup>st</sup> stage of storage to the following electronics means
  - d) Suitable power regulation, transformation, and conditioning electronics in the form of a DC to DC converter to accept the energy in the 1<sup>st</sup> stage of storage and employ it to efficiently and safety charge a 2<sup>nd</sup> stage of storage.
- e) A 2<sup>nd</sup> stage of storage such as a lithium-ion (Li-Ion)(or other chemistry of rechargeable) battery to accept the charging energy from the electronics.

### DETAILED DESCRIPTION OF THE INVENTION

## 5 In figure 4, there is shown a

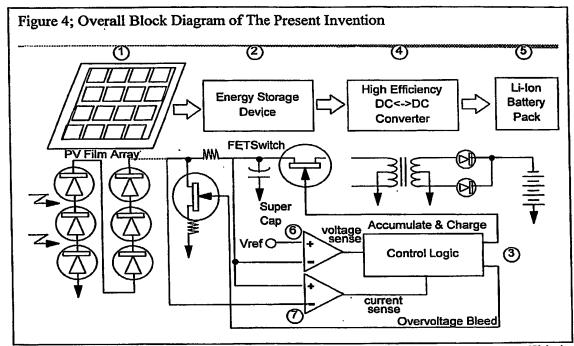

- a) A PV array (1) as an example of variable and intermittent energy source. This in turn is connected to,
- b) A 1<sup>st</sup> stage energy storage means (2) such as supercapacitor. Said 1<sup>st</sup> stage energy storage means is referred to herein as soft storage to distinguish it from what we define as the hard storage properties of a typical battery. The essential properties of said 1<sup>st</sup> stage energy storage means are that it can accept and efficiently accumulate even low levels of energy from the energy source (1) without a threshold and without waste. The 1<sup>st</sup> stage energy storage means (2) is connected to both control logic (3) as well as a switchable DC to DC converter (4).

- c) The control logic means (3) monitors the voltage level on the 1<sup>st</sup> stage energy storage means (2) and when the voltage sensor (6) recognizes that the voltage exceeds a preset threshold, it activates the switch and DC to DC converter means (4). In the preferred embodiment of the device, the control logic also provides means to protect the 1<sup>st</sup> stage energy storage means (2) from over-voltage conditions that might damage it by the use of 2<sup>nd</sup> switch to bleed excess energy and thereby limits the maximum voltage across the 1<sup>st</sup> stage energy storage means (2). Also part of the control logic is a current flow sensor (7). The current flow sensor can determine if the energy source is strong enough to source current into the energy storage means (2). Should the energy from the source cause the current flow to reverse thereby discharging the energy storage means (2); the current flow sensor (7) can signal the control logic (3) to make use of the energy in the storage means (2) even if the voltage is below the optimum threshold.
- d) A 2<sup>nd</sup> stage of hard storage means (5) shown with a Li-Ion battery as an example. As used herein, we define hard storage as the energy storage device employed for long term storage with a capacity of significantly more energy (higher density) than the 1<sup>st</sup> stage soft storage means (2).

15

5

10

#### WHAT IS CLAIMED IS:

5

- 1. An electronic device which captures and accumulates variable levels of electrical energy in suitable short term storage means until the energy is of such a level that it can be efficiently transferred to long term storage means, comprising:
  - a) A source of variable and intermittent energy.

10

- b) 1st stage energy storage means suitable for efficiently capturing and accumulating the energy from the source.
- c) Electronic means which senses and monitors the energy accumulated in the 1<sup>st</sup> stage storage means and then activating charge management electronics when there is sufficient energy in the 1<sup>st</sup> stage storage to efficiently charge a 2<sup>nd</sup> stage energy storage means

15

- d) A 2<sup>nd</sup> stage means of energy storage, which accepts the charging energy from the electronic means and stores it for latter usage.
- 2. The means of claim 1 in combination with an electrical double layer capacitor as suitable means for 1<sup>st</sup> stage storage.

20

3. The means of claim 1 in combination with a control circuit that senses an overvoltage condition in the 1<sup>st</sup> stage storage means and limits the voltage to a safe level.

25

- 4. The means of claim 1 in combination with a control circuit that senses the direction of current "into" versus "out of", the 1<sup>st</sup> stage storage means and activates the transfer of any useful energy from the 1<sup>st</sup> stage storage means to the 2<sup>nd</sup> stage storage means even if the voltage in the 1<sup>st</sup> stage storage means is not optimal for such a transfer.
- 5. The means of claim 1 in combination with a photovoltaic cell or array of cells as the energy source means

- 6. An electronic device which captures and accumulates varying levels of electrical energy in suitable short term storage means until the energy is of such a level that it can be efficiently transferred to long term storage means, comprising:
- a) A connector that allows an external energy source to be briefly connected to the device for the purpose of rapidly charging a 1<sup>st</sup> stage energy storage means (this could be in the form of an AC or DC transformer, step-up or step-down, with or without rectifiers).
- .10 b) A 1<sup>st</sup> stage energy storage means suitable for efficiently capturing and accumulating the energy from the source.

5

15

- c) Electronic means which senses and monitors the energy accumulated in the 1<sup>st</sup> stage storage means and then activating charge management electronics when there is sufficient energy in the 1<sup>st</sup> stage storage to efficiently charge a 2<sup>nd</sup> stage energy storage means
- d) A 2<sup>nd</sup> stage means of energy storage, which accepts the charging energy from the electronic means and stores it for latter usage.

TITLE: A TWO STAGE ENERGY STORAGE DEVICE

5

INVENTOR: ANDREW C. KULAR

### ABSTRACT OF DISCLOSURE

.10

An electronic device, which captures and accumulates varying levels of electrical energy in suitable short-term storage means until the energy is of such a level that it can be efficiently transferred to long-term storage means.

ETTHER THE HIT THE TENED 1 OF

	CRIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  Docket No. 5276-110P						
Serial No. HEREWITH	Filing Date HEREWITH	Patent No. HEREWITH	Issue Date HEREWITH				
Applicant/ Andrew C. Kulan Patentee:	•						
Invention: A TWO STAGE	Invention: A TWO STAGE ENERGY STORAGE DEVICE						
I hereby declare that I am:							
•	mall business concern identifie	d below: ered to act on behalf of the con	corn Identified below				
	•		cem identified below,				
	OSOL Solar Technologies, Ltd. 7 Hinton Avenue N. Ottawa, O	ntario. Canada K1Y 4P1					
13 CFR 121.3-18, and reprint (b) of Title 35, United State does not exceed 500 personis the average over the protemporary basis during each either, directly or indirectly controls or has the power to be a second of the control of t	roduced in 37 CFR 1.9(d), for its Code, in that the number of its. For purposes of this statement of the conditions of the pay periods of the fisce, one concern controls or has a control both.	concern qualifies as a small bus purposes of paying reduced fe employees of the concern, inconent, (1) the number of employe cern of the persons employed cal year, and (2) concerns are a the power to control the other e been conveyed to and remand and invention described in:	ees under Section 41(a) and cluding those of its affiliates, rees of the business concern on a full-time, part-time or affiliates of each other when r, or a third party or parties				
the specification	on filed herewith with title as lis	ted above.	•				
• •							
	bove-identified small busines	s concern are not exclusive,					
person, other than the inve	entor, who could not qualify a	e next page and no rights to the san independent inventor und cern under 37 CFR 1.9(d) or a	ler 37 CFR 1.9(c) or by any				

				nave assigned, granted, evey, or license any right		censed or am under an n is listed below:
	-		organization ex or organization	xists. Is listed below.		
FULL NAME ADDRESS						
ADDRESS		Individual		Small Business Concern		Nonprofit Organization
FULL NAME ADDRESS						
FULL NAME		Individual		Small Business Concern	·	Nonprofit Organization
ADDRESS						
		individual		Small Business Concern		Nonprofit Organization
FULL NAME ADDRESS				•		
		Individual		Small Business Concern	. 0	Nonprofit Organization
I acknowledgentitlement to maintenance I hereby decinformation a willful false s Title 18 of application, a	erring to the ge the duty to small en fee due after that all and belief a statements at the United any patent is	ir status as s to file, in th tity status p er the date of I statements re believed to and the like s States Cod ssuing there	small entities. ( is application or or to paying on which status or made herein to be true; and so made are ple, and that son, or any pate	or patent, notification of or at the time of pays as a small entity is no less of my own knowledge at further that these stater unishable by fine or impact willful false statement to which this verified	any change in ing, the earliest onger appropriate are true and that ments were mad risonment, or bottents may jeopa	at all statements made on the with the knowledge that oth, under Section 1001 of ardize the validity of the
NAME OF PE		•	Thomas J. O	nka	<del></del>	
OTHER THAN		NING	A 44 a mm a m 5 a m	Auntinaus		•
OTHER THAN ADDRESS OF		SIGNING	Attorney for	Applicant Lechner & Woodbridge I		
ABBINEOU O	FERSON	digitility.	112 Nassau S	_		•
			P.O. Box 592			•
			Princeton, N.	J 08542-0592		
SIGNATURE:		Trom	ss Eml	D. D.	ATE: <b>6</b> /	11/03
				•		

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ other:

# IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.